



REVISIONS			
LTR	DATE	DESCRIPTION	BY
		RELEASED PER ECN #247	
A	3-18-99	ADDED LUBRICATION POINT @ E-4 PER ECN #1937	AKH

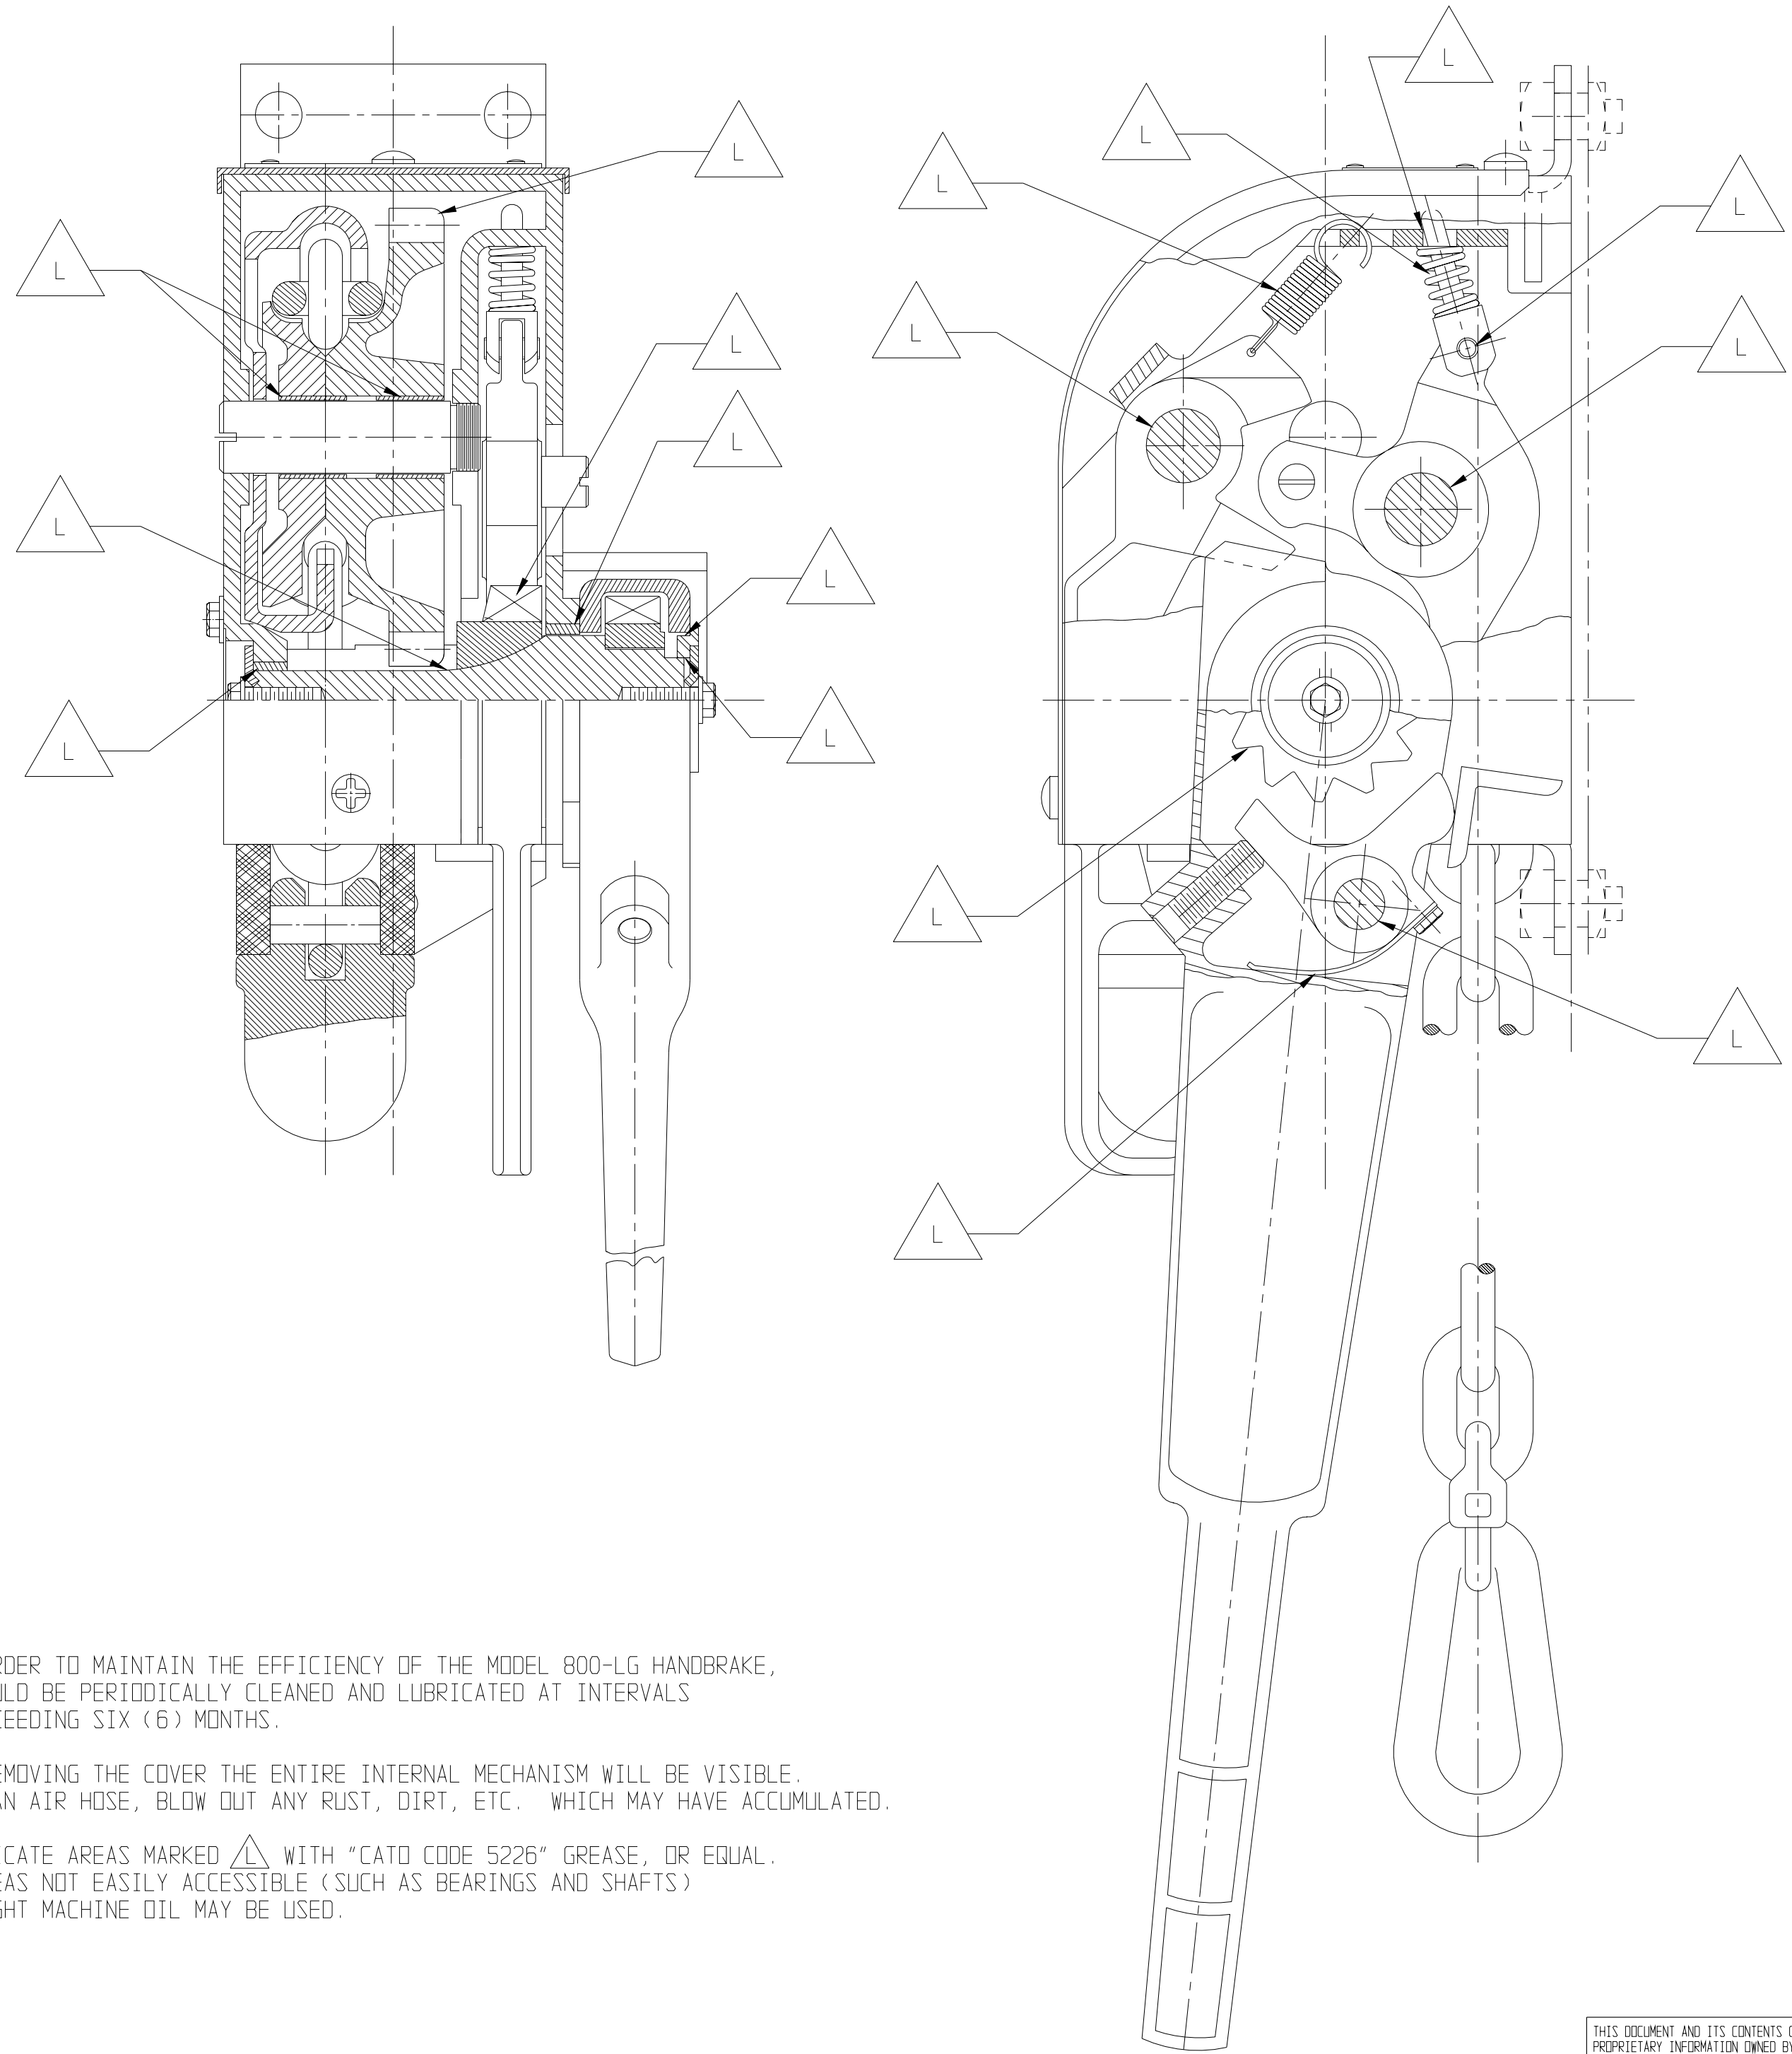

NOTE:
 IN ORDER TO MAINTAIN THE EFFICIENCY OF THE MODEL 800-LG HANDBRAKE,
 IT SHOULD BE PERIODICALLY CLEANED AND LUBRICATED AT INTERVALS
 NOT EXCEEDING SIX (6) MONTHS.

BY REMOVING THE COVER THE ENTIRE INTERNAL MECHANISM WILL BE VISIBLE.
 USING AN AIR HOSE, BLOW OUT ANY RUST, DIRT, ETC. WHICH MAY HAVE ACCUMULATED.

LUBRICATE AREAS MARKED  WITH "CATO CODE 5226" GREASE, OR EQUAL.
 FOR AREAS NOT EASILY ACCESSIBLE (SUCH AS BEARINGS AND SHAFTS)
 ANY LIGHT MACHINE OIL MAY BE USED.

THIS DOCUMENT AND ITS CONTENTS CONTAIN CONFIDENTIAL AND PROPRIETARY INFORMATION OWNED BY ELLCON-NATIONAL, INC. AND IT AND ALL COPIES THEREOF ARE TO BE RETURNED TO ELLCON-NATIONAL WHEN SO REQUESTED. THIS DOCUMENT OR ANY PART THEREOF SHALL NOT BE REPRODUCED, COPIED, OR TRANSMITTED ELECTRONICALLY. THE INFORMATION CONTAINED HEREIN SHALL NOT BE DISCLOSED BY THE RECIPIENT TO OTHERS OR USED BY RECIPIENT WITHOUT THE PRIOR WRITTEN CONSENT SPECIFIC TO EACH CASE. ELLCON-NATIONAL, INC.

ELLCON NATIONAL
 50 BEECHTREE BLVD. GREENVILLE, S.C. 29605

LUBRICATION POINTS
 FOR ALL MODEL 800
 HANDBRAKES

SCALE 6"=1'-0" DATE 11-19-98 REV. A

DRAWN AKH
 CHECKED C-33962